



(Pic 4.2)

B. Also connect a grounding wire to the grounding terminal on the bottom box, check the connections. Adjusting the wires length, then tighten the tie wrap and shave the superabundance length of wrap. (Ref. Pic 4.2)

C. Please make the fixed hole for sockets structure at the same line with the bottom box, and fasten the 4 screws which fixed the bottom box. (Ref. Pic 4.3)




(Pic 4.3)



(Pic 4.4)


D. Adjust the degree of tightness of all line (no influence on opening), install press plate, and lock it tightly with screws. (Ref. Pic 4.4)

E. Assembling the product into the mounting hole on the table top, and press the bottom side of table top with fixed blocks (one piece each for right and left), fasten screws. (Ref. Pic 4.5)




(Pic 4.5)

### 3. Opening hole size (See Pic 3.1)

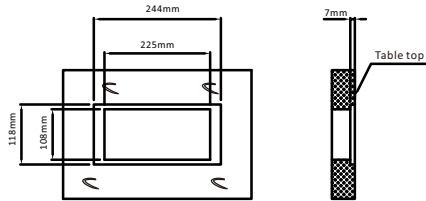

(Pic 3.1)

### 4. installation steps




(Pic 4.1)

A. Remove the power module and the low voltage module one by one; Put the power cable and the low voltage cable through the wire hole of bottom box separately; Then insert the metal clip and fasten the screws; (Ref. Pic 4.1)


## STS-215 Desktop sockets User Manual

### 1. Product parts drawing (See Pic 1.1)

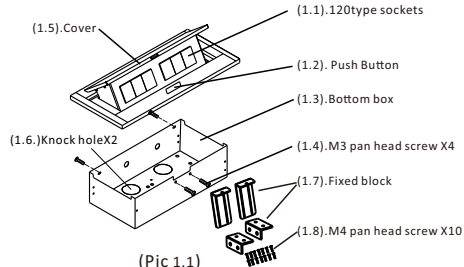

(Pic 1.1)

### 2. Outline dimension (See Pic 2.1)

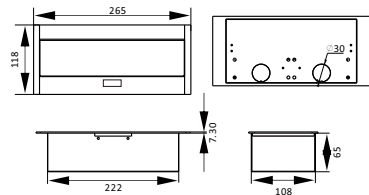

(Pic 2.1)